



SPECIFICATION

PART NO. : 10102666

MODEL NO. : BB-1200 Series (US)

DESCRIPTION : US Standard,1000Wh,AC 1200W 110V ,PV
200W,DC 120W,QC3.0*2+PD60W+PD18W

VERSION NO. : V0.9


DATE : 2021-11-25




General Description

This product is a high-end fashion off-grid portable power station, independently developed by . Light and portable, stylish and generous, using automotive-grade LiFePO4 battery, safe, reliable, and durable; providing 110V /12V/5V AC and DC output, suitable for various equipment such as aerial drones, portable ventilators, medical equipment, mobile phones, tablets, laptops, desktop computers, small printers, various lamps, small fish tanks, photographic equipment, electric balance wheelbarrows, etc. It's convenient for users to use at home, travel, outdoor work, camping picnics, mountaineering adventures, etc.

Model#	AC Output Power	Battery	Pack Way	Battery Capacity
BB-1200	1200W Max.	32135 LiFePO4 15.5Ah/3.2V	10S2P (31Ah/32V)	992WH

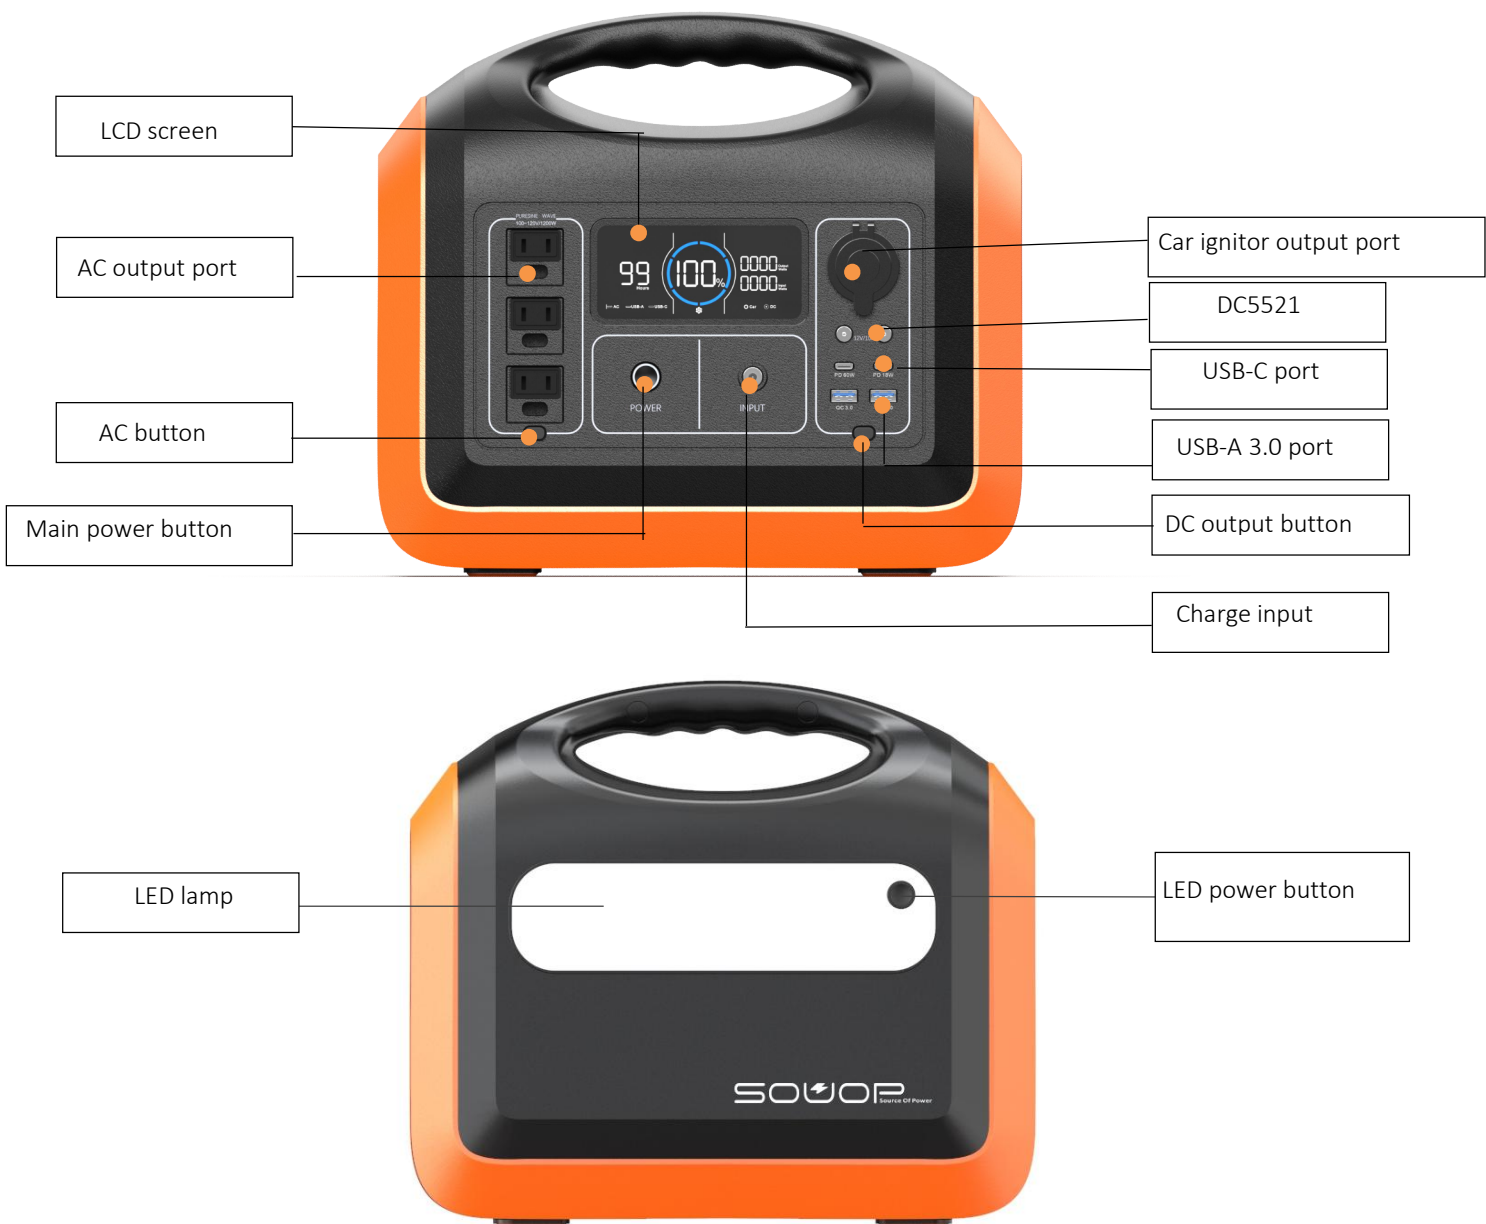

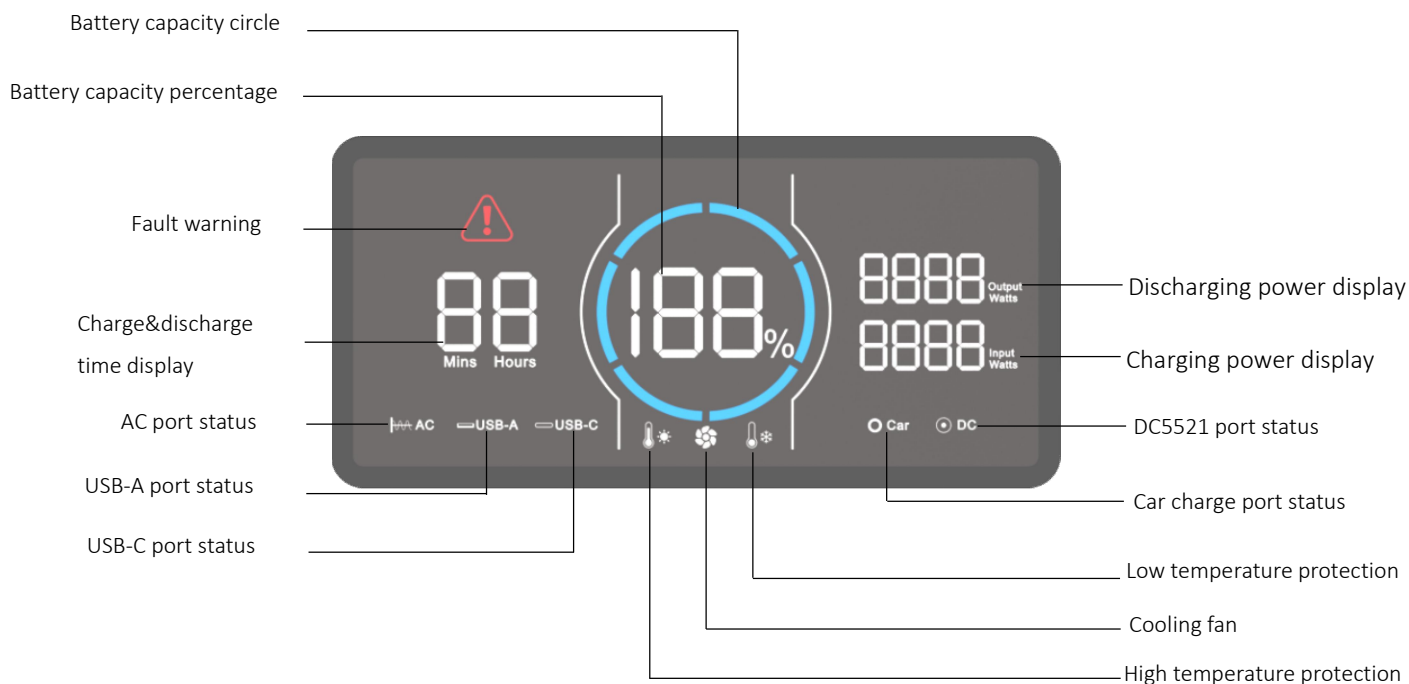

1、 Control and display

Item	Features	Notes
Main power button	Master switch for each function (except lighting)	Long press for 2S to turn on or off the main power supply, when it is turned on, a circle of LED lights around the button will light up
DC power button	Control car charger and DC5521 output or turn off	When the main power switch is turned on, lightly press the button to turn on the car charger and DC5521 output; press it again to turn off. Automatically turn off the output if no equipment access, overload, short circuit, over temperature protection, etc. are detected within 12 hours
AC power button	AC output control switch	When the main power switch is on, press the button lightly to turn on the AC output; press it again to turn off. After 12 hours, no device access, overload, short circuit, over temperature protection, etc. are not detected and the output is automatically turned off
LED lamp power button	Control LED lighting on or off	Press the button once (no need to turn on the main switch), the LED brightness is 50%, press again to be 100%, press again to SOS signal, press again to turn off, and then cycling in turn. The LED lighting module is not controlled by the main switch
Battery capacity circle and battery capacity percentage	Battery level display when charging or discharging	When charging, the battery capacity percentage is displayed in the middle, and the blue circle circulates in the form of a marquee. When the product is fully charged or the charger is disconnected, the battery indicator stops. The percentage and outer circle are displayed according to the actual battery.. When discharging, the battery capacity percentage is displayed according to the actual power. The blue circle decreases in percentage accordingly.
Charging/discharging power display	Display charging/discharging	If the charging power is greater than the discharging power, the charging power is displayed; if the discharging power is greater than the charging

	power	power, the discharging power is displayed.
Remaining charge/discharge time	Display remaining charge/discharge time	Real-time display of remaining charge/discharge time according to current battery capacity and charge/discharge power. Display logic: when the time exceeds 1 hour, it is displayed in X.Y hours, and when the time is less than 1 hour, it is displayed in minutes.
Fault/protection warning	Indicates that the product is in a fault state	When the output interface is overloaded, short-circuited, or the internal temperature is too high or too low, the icon will be displayed, and the icon will be closed after troubleshooting.
High temperature protection warning	Indicates that the battery temperature is too high	When the internal temperature is too high, the icon will be displayed, and the icon will be closed when the temperature is restored
Low temperature protection warning	Indicates that the battery temperature is too low	When the internal temperature is too low, the icon will be displayed, and the icon will be closed when the temperature is restored
Fan on indicator	Indicate fan working status	When the fan is on, the icon is displayed. When closed, the icon goes out.
Car charger port status indication	Indicate the working status of the car charger port	When the car charger is turned on, the icon is displayed, when it is turned off, the icon is off
DC5521 port status indication	Indicate the working status of DC5521 port	When DC5521 turns on the output, the icon is displayed, when it is turned off, the icon goes out
USB-C port status indication	Indicate the working status of USB-C port	When USB-C turns on the output, the icon is displayed, when it is turned off, the icon goes out
USB-A port status indication	Indicate the working status of USB-A port	When USB-A turns on the output, the icon is displayed, when it is turned off, the icon goes out
AC port status indication	Indicate the working status of AC port	When AC turns on the output, the icon is displayed, when it is turned off, the icon goes out
Backlight	/	When there is a button operation, it is fully lit., when no button operation is detected for 5 minutes, the screen backlight is off. When charging, it is fully lit, and if no button operation is detected for 5 minutes, the screen backlight is off. When the charge is removed, 30% brightness, it will go out automatically without operation after 5 minutes.
Power button breathing light	/	When charging, discharging, and standby, the breathing light flashes, and the breathing light goes out during sleep..

2、DC Input Characteristics

Parameter	Symbol	Unit	Typical	Remarks
Input voltage range	Vin	Vdc	12-30	The product comes standard with 24V/8.3A adapter, Intelligent identification MPPT 240W Max.
Input current range	Iin	A	0-8.3	
Adapter charging time	/	Hrs	5-7	
Solar panel charging time	/	Hrs	/	The maximum charging time depends on the light intensity and solar panel power
Maximum charging interval time	/	month	6	Store power >= 50%
Input port	/	/	/	DC7909 female end, middle and inner ring are positive, outer ring is negative

3、DC Output Characteristics

3.1、Car Charger Output Characteristics

Parameter	Symbol	Unit	Typical	Remarks
Output voltage range	Vo	Vdc	12	/
Output current range	Io	A	10	/
Overload protection	/	A	11	When the output current exceeds this current limit, the output will be turned off. After the overload is released, the output must be restored by pressing the DC switch manually.
Short circuit protection	/	/	/	If the output terminal, wire or external device is short-circuited, the output port will stop output. When short-circuit is removed, you need to manually press the DC switch to restore the output.
Output port	/	/	/	One cigarette lighter output

3.2、DC5521 Output Characteristics

Parameter	Symbol	Unit	Typical	Remarks
Output voltage range	Vo	Vdc	12	/
Output current range	Io	A	10	Two DC (5521) are output in parallel, and the total current with the car charger (cigarette lighter) is less than 10A.
Overload protection	/	A	11	When the output current exceeds this current limit, the output will be turned off. After the overload is released, the output must be restored by pressing the DC switch manually.
Short circuit protection	/	/	/	If the output terminal, wire or external device is short-circuited, the output port will stop output. When short-circuit is removed, you need to manually press the DC switch to restore the output.
Output port	/	/	/	Two DC5521 parallel outputs

4、USB-A Output Characteristics

Parameter	Symbol	Unit	Typical	Remarks
Output voltage range	Vo	Vdc	5.0	The default output is 5V, the QC protocol is automatically recognized, and output corresponding voltage, QC3.0/QC2.0, FCP, SCP, AFC, MTKPE+2.0/1.1, Apple2.4A
			9.0	
			12.0	
Output current range	Io	A	3	@5.0V
			2	@9.0V
			1.5	@12.0V
Overload protection	/	W	18	When the output power exceeds the maximum power, the output will be turned off. After the over-power state is released, you need to manually press the USB switch to restore the output..
Short circuit protection	/	/	/	When the output terminal, wire or external device is short-circuited, the output port will stop output. When short-circuit is removed, you need to manually press the USB switch to restore the output.
Output port	/	/	/	Two USB-A independent outputs

5、USB-C (PD60W) Output Characteristics

Parameter	Symbol	Unit	Typical	Remarks
Output voltage	Vo	Vdc	5.0	Automatically recognize the PD protocol and output the corresponding voltage. PD3.0, PD2.0, QC3.0, QC2.0, FCP, SCP, AFC, MTKPE+2.0/1.1, Apple2.4A,
			9.0	
			12.0	
			15.0	
			20.0	
Output current	Io	A	3	
Overload protection	/	A	3.3	If the output current exceeds this current limit point, the output will be turned off. After the overcurrent is released, re-plug the device to restore the output.
Short circuit protection	/	/	/	If the output terminal, wire or external device is short-circuited, the output port will stop output. When short-circuit is removed, re-plug the device to resume output.
Output port	/	/	/	One USB-C output

6、USB-C (PD18W) Output Characteristics

Parameter	Symbol	Unit	Typical	Remarks
Output voltage range	Vo	Vdc	5.0	Automatically recognize the PD protocol and output the corresponding voltage 5V. PD3.0, PD2.0, QC3.0, QC2.0, FCP, SCP, AFC, MTKPE+2.0/1.1, Apple2.4A,
			9.0	
			12.0	
Output current range	Io	A	3	@5.0V
			2	@9.0V
			1.5	@12.0V
Overload protection	/	W	18	If the output current exceeds this current limit point, the output will be turned off. After the overcurrent is released, re-plug the device to restore the output.
Short circuit protection	/	/	/	If the output terminal, wire or external device is short-circuited, the output port will stop output. When short-circuit is removed, re-plug the device to resume output.
Output port	/	/	/	One USB-C output

7、AC Output Characteristics

Parameter	Symbol	Unit	Typical	Remarks
Output voltage range	Vo	Vac	110	/
Output power	Po	W	1200	
Peak output power	/	W	3600	Duration \cong 200mS
Output AC frequency	F	Hz	50	50/60Hz can be switched
Output AC waveform	/	/	/	Pure Sine wave
Overload protection	/	W	100-110%	If the overload last for 1 minutes, the output will be turned off. After the over current is released, you need to manually press the AC switch to restore the output.
	/	W	110-135%	If the overload last for 20s, the output will be turned off. After the over current is released, you need to manually press the AC switch to restore the output.
Short circuit protection	/	/	/	If the output terminal, wire or external device is short-circuited, the output port will stop output. When short-circuit is removed, you need to manually press the AC switch to restore the output.
Output port	/	/	/	AC 2PIN European socket, 2 parallel outputs

8、LED Lighting Output Characteristics

Parameter	Symbol	Unit	Min.	Typical	Max.	Remarks
Output power	/	W	3.5	7	8	/
Luminous flux	/	lm	/	700	/	/
Color temperature	CCT	K	3850	4000	4150	/
CRI	CRI	/	80	/	/	/

9、Battery Pack Parameters

Parameter	Symbol	Unit	Min.	Typical	Max.	Remarks
Cell model	/	/	/	/	/	32135 LiFePO4
Pack method	/	/	/	/	/	10 series 2 parallel
Voltage	/	Vdc	/	32	/	/
Battery capacity	/	Ah	/	31	/	/

10、Environmental Requirements

Parameter	Symbol	Unit	Min.	Typical	Max.	Remarks
Working temperature (ambient temperature)	°C	degree	0	--	45	/
Working humidity	/	/	10%	--	90%	/
Storage temperature	°C	degree	-20	--	65	/
Storage humidity	/	/	5%	--	95%	/
Altitude	n	meter	-50	--	3000	/
Cooling method	/	/	--			Air-cooled convection heat dissipation

11、Other Characteristics

Parameter	Symbol	Unit	Min.	Typical	Max.	Remarks
Lifespan	Lf	year	3			--
Weight	N.W	g		1100		--
Dimension	DIM.	mm (inch)	L*W*H 330*220*289 (12.99*8.66*11.38)			--

Remarks: Unless otherwise specified, all the above parameters are measured under the fully loaded state of the product and at 25°C.

12. Safety Regulation

Certification	Safety standard	Status	Remarks
FCC		Pass	
UL	UL2743	Pending	
ROHS		Complaint	
UN38.3		Pass	

13. Electromagnetic Compatibility

EMI/EMS Item	Standard	Criterion
Conduction CE	FCC part 15	Class B
Radiation RE	FCC part 15	Class B
Harmonic	IEC/EN 61000-3-2	Class C

14. Safety Test Projects

Safety test	Technical requirement	Remarks
Surge	1500Vac/5mA/60S	AC output-ground, no breakdown, no arcing
Insulation resistance	≥100Mohm	AC output to ground, test voltage 500Vdc
Leakage current	≤0.75mA	220Vac

16. Accessories List

No.	Accessory name	Quantity	Remarks
1	BB-1200(US)	1	
2	Adapter 24V/8A	1	
3	Car charger to DC7909 charging cable	1	
4	User manual	1	
5	Warranty card	1	

17. Packaging

- Net weight : 11kg
- Quantity : 1pc
- Package size : L*W*H=430*300*370 mm (16.93*11.81*14.57 inch)
- Gross weight : 14.5kg



Precautions

- If the product packaging is damaged, please confirm whether the appearance of the product is complete, and the external structure of the product is not allowed to have cracks.

Transportation

- It is suitable for transportation by car, ship, and airplane. During transportation, it should be covered; sun protected and civilized loading and unloading.

Storage

- Product storage should comply with GB 3873-83.
- When storing for a long time, it is recommended to charge it every six months to avoid damage to the battery due to over-discharge.

RoHS:

- Products comply to the European Standard 2011//65/EC

Change Records

Version No.	Change Content Description	Date	Remarks
v0.9	Initial Draft	2021/08/04	