



LED Wallpack Light BRIGHTEN YOUR LIFE

NEW LED TECHNOLOGY THAT ALLOWS THE
COEXISTENCE OF ENVIRONMENTAL
PROTECTION AND ENERGY SAVING

Benefits

1. Replace conventional Wallpack Lights.
2. Precision Die Cast Aluminum Housing.
3. Fade Resistant Powder Coat Finish.
4. Easy Installation.
5. CE ROHS listed.
6. Double head light.



BB-RSD-XXX-C3


Features

1. Beam angle:45 degrees.
2. Aluminum die-casting heat sinks is good for heat dissipation.
3. It's major to replace the conventional wallpack light.
4. Green, energy saving, long and reliable life of 50,000 hours.
5. No RF interference, No IR/UV radiation ,no mercury pollution.
6. Wide colour availability in degrees Kelvin(K),2700-6700K.
7. Streamline exterior design, beautiful appearance.
8. Environment friendly ,energy saving (70~80%).
9. Special circuit design, each LED work separately, avoiding the single broken LED influence problem.



Application

1. Parking areas Lighting.
2. Garden yard Lighting.
3. Outdoor Building Lighting.
4. Indoor Wallpack Lighting.

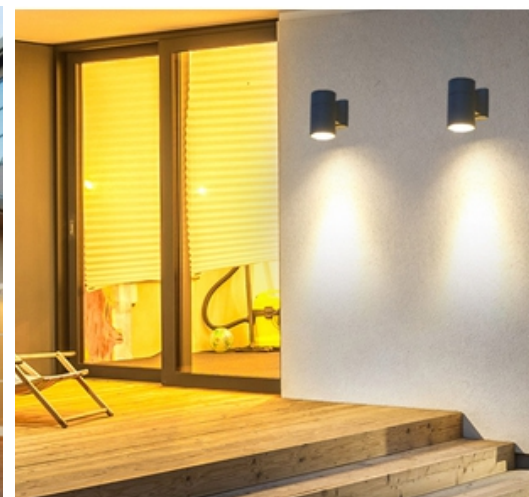

SPECIFICATIONS

Power	2*3W	2*5W	2*10W	2*15W	2*18W	2*20W
Model	BB-RSD-6W-C3	BB-RSD-10W-C3	BB-RSD-20W-C3	BB-RSD-30W-C3	BB-RSD-36W-C3	BB-RSD-40W-C3
Luminous Flux	600lm	1000lm	2000lm	3000lm	3600lm	4000lm
Replacement	HPS 20W	HPS 30W	HPS 75W	HPS 100W	HPS 120W	HPS 150W
Dimension	65*160mm	90*260mm	110*300mm	145*300mm	145*300mm	160*300mm
Light Source	COB LED					
Luminous Efficacy	100lm/W					
Operation Temp.	-40 to +45°C					
CCT	2700K SW / 3000K WW / 4100K NW / 5000K DW / 5700K CW / 6500K SCW					
CRI	85					
Life Span	50,000 hours at 25°C					
Voltage	100-277VAC/50-60HZ					
Driver	Waterproof constant current power supply					
Sensor	No sensor, Photocell sensor, PIR sensor optional.					
Beam Angle	45°					
Color	Black					
IP	65					
PF	>0.95					
Warranty	3/5Years					

PROJECTS

By using our 20w led wallpack light replace 75W MH/HPS/HID/LPS ect traditional lamp fixture for outdoor wall light, customer is now able to save a lot per month from his electric bill.



Replace



20W LED = 75W HPS

Note:

- Don't take the LED lamp apart.
- The LED lamp must work under the right voltage according to the specification.

PACKING INFO



Item	Packaging unit	Carton Size(mm) (L*W*H)	N.W	G.W	Volume weight
2*3W	20pcs/CTN	445x385x385mm	10.0kg	12.5kg	16.0kg
2*5W	18pcs/CTN	570x400x530mm	16.2kg	18.7kg	27.5kg
2*10W	10pcs/CTN	695x330x385mm	13.0kg	15.5kg	21.0kg
2*15W	6pcs/CTN	525x335x510mm	15.0kg	16.5kg	21.0kg
2*18W	6pcs/CTN	525x335x510mm	15.0kg	16.5kg	21.0kg
2*20W	6pcs/CTN	525x505x505mm	18.0kg	20.0kg	31.0kg