

## **Benefits**

- 1. Replace conventional wallpack lamp.
- 2. Precision die cast aluminum housing.
- 3. Durale chip and fade resistant power coat finish.
- 4. Easy installation.
- 5.CE ROHS ETL listed.











### **Features**

- 1. Beam angle: 120 degrees.
- 2. Aluminum die-casting heat sinks is good for heat dissipation.
- 3. It's major to replace the CFL/MH/HID/HPS.
- 4. Green, energy saving, long and reliable life of 50,000 hours.
- 5. No RF interference, No IR/UV radiation, no mercury pollution.
- 6. Wide colour availability in degrees Kelvin(K),2700-6700K.
- 7. Streamline exterior design, beautiful appearance.
- 8. Environment friendly, energy saving (70~80%).
- 9. Solar powered, no wiring required
- 10. Special circuit design, each LED work separately,
- avoiding the single broken LED influence problem.







#### **Application**

- 1. Parking lot Lighting.
- 2. Garden yard Lighting.
- 3. Outdoor Building Lighting.
- 4. High/Low Bay Lighting.








# **SPECIFICATIONS**

Solar Power	100W
Model	BB-100W
Light Source	SMD LED
Luminous Efficacy	150lm/w (single)
Operation Temp.	-40 to +45℃
CCT	2700K SW / 3000K WW / 4100K NW / 5000K DW / 5700K CW
CRI	85
Life Span	50,000 hours at 25℃
Voltage	100-277VAC/50-60HZ
Driver	UL listed power supply
Dimming	NO
Beam Angle	120°
Line length	Single light line length of 4 meters
PF	>0.95
Warranty	5Years

## DIMENSIONAL DRAWING

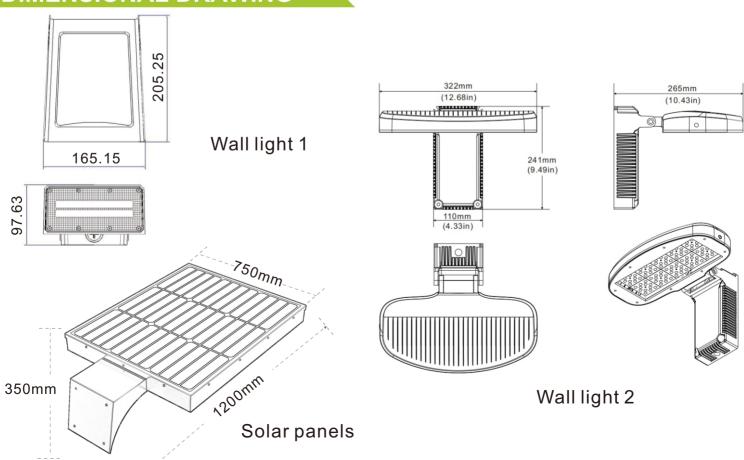

### **LUMINOUS INTENSITY DISTRIBUTION**

