

Benefits

- 1. Replace conventional Wallpack Lights
- 2. Precision Die Cast Aluminum Housing
- 3. Fade Resistant Powder Coat Finish
- 4. Easy Installation
- 5. CE ROHS listed









Features

- 1. Aluminum die-casting heat sinks is good for heat dissipation.
- 2.It's major to replace the conventional wallpack light.
- 3. Green, energy saving, long and reliable life of 50,000 hours.
- 4. No RF interference, No IR/UV radiation, no mercury pollution.
- 5. Wide colour availability in degrees Kelvin(K),2700-6700K.
- 6. Streamline exterior design, beautiful appearance.
- 7. Environment friendly ,energy saving (70~80%).
- 8. Special circuit design, each LED work separately, avoiding the single broken LED influence problem.







Application

- 1. Parking lot Lighting.
- 2.Garden yard Lighting.
- 3. Outdoor Building Lighting.
- 4. High/Low Bay Lighting.







SPECIFICATIONS

Power	60W	100W				
Model	BB-RSD-60W-C	BB-RSD-100W-C				
Luminous Flux	6600lm 11000lm					
Replacement	MH 175W	MH 300W				
Light Source	SMD LED					
Luminous Efficacy	110lm/w					
Operation Temp.	-40 to +45℃					
ССТ	2700K SW / 3000K WW / 4100K NW / 5000K DW / 5700K CW					
CRI	80					
Life Span	50,000 hours at 25℃					
Voltage	100-277VAC/50-60HZ 200-480VAC/50-60HZ Available					
Driver	UL listed power supply					
Sensor	Microwave sensor Daily sensor available					
Beam Angle	30° 60° 90° 120° Type II Type III					
PF	>0.95					
Warranty	3/5 Years					

DIMENSIONAL DRAWING

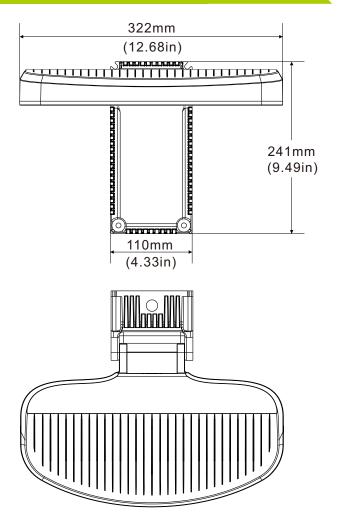

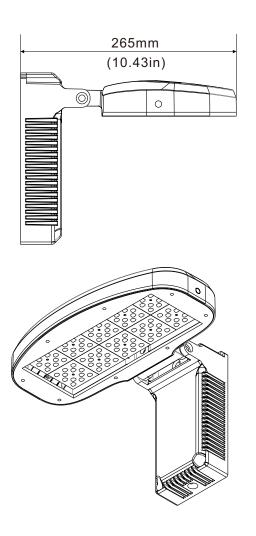


Wall mounting

STEP1:Drill 4 holds on the wall, as picture1.

STEP2:Put the four expansion studs into four holes.

STEP3:Use four M5 screws to secure the lamp to the wall through 4 holds, as picture 2.

STEP4: The lamp are tightly fastened, and finished.

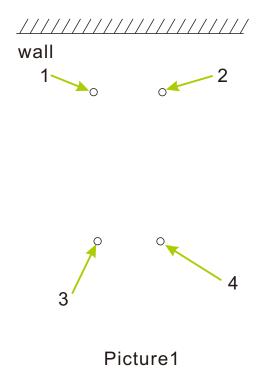



PROJECTS

By using our 100W Wallpack Light to replace 300W High Pressure Sodium Lamp fixture for outdoor parking lot lighting, the customer is now able to save a lot per month from his electric bill.



100W LED = 300W MH

Note:

- Don't take the LED lamp apart.
- The LED lamp must work under the right voltage according to the specification.

PACKING INFO



Item	Packaging	Dimensions (L*W*H)	N.W	G.W	Volume weight
40W-100W	1pc/Box	380*300*140mm	4.0kg	4.5kg	4.5kg