

Durable Lighting Made for Industrial Safety



Hazardous Location LED Luminaire A Series (Zone 1, 2, 21, 22)



A



A3



A4



Product Description

The A Series LED luminaire is the ideal choice for marine and hazardous applications. They can be used in locations where moisture, dirt, dust, corrosion and vibration may be present, or areas where wind, water, snow or high ambient can be expected.

Features

- 0-10V dimming
- High luminous efficacy - Up to 140 lumens per watt
- Compact and robust structure, excellent reliability
- Various installation ways for different applications
- Great impact resistance with IK08/IK10 certified
- Copper-free aluminum housing, great corrosion resistance and cooling performance
- Emergency function optional for A3 and A4

Compliance

ATEX Standard:

⊕ II 2 G Ex eb mb IIC T6...T4 Gb

⊕ II 2 D Ex tb IIIC T80°C...T100°C Db

IECEX Standard:

Ex eb mb IIC T6...T4 Gb

Ex tb IIIC T80°C...T100°C Db

Zone 1&2, Zone 21&22

CB (Ref. Certif. No.: DE 2-038462-M1)

IP66/IP67

IK08 (glass cover)

IK10 (with wire guard)

1000 hours salt spray



Application

- Power Plants
- Heavy Industrials Storage Facility
- Paper mills
- Wastewater Treatment Plants
- Loading Docks Platforms
- Offshore Environments
- Chemical Processing Facility
- Petrochemical Processing Facility
- Metallurgical Industry
- Coal Mine
- Food and Alcohol industry

Warranty

5-Year Standard Warranty

LED lumen Maintenance: L70> 78,000 Operation Hours@55°C

Technical Parameter

• Electrical

Specification	EX-80W-A YZDAF	EX-100W-A YZDAF
Rated Power	80W	100W
Input Voltage	200-250VAC	
Input Frequency	50/60Hz	
Power Factor	> 0.95	
Emergency Function	No emergency function	

• Optical

Specification	EX-80W-A YZDAF	EX-100W-A YZDAF
Lumen Output	11200lm	14000lm
Lumens Per Watt	140lm/W	
CCT	2200K-7000K	
CRI	> 70	
Beam Angle	40°/45°/60°/90°	
Dimming	Both non-dimmable and 0-10V dimming are available	

• Environmental

Specification	EX-80W-A YZDAF	EX-100W-A YZDAF
Ambient Operating Temperature	T5: -40°C to +45°C (-40°F to +113°F); T6: -40°C to +40°C (-40°F to +104°F)	

• Mechanical

Specification	EX-80W-A YZDAF	EX-100W-A YZDAF
Housing Material	Copper-free aluminum	
Lens	Tempered glass & PC	
Hardware	Stainless steel	
Fixture Color	Gray RAL7040 (Standard)	
Protection	IP66/IP67/IK08 (glass cover)/IK10 (with wire guard)	
Mounting	Ceiling, Wall, Hook, Pole, Arm, Stanchion	
Cable Entries*	Side: 3/4 NPT, M20, M25, 1/2NPT Top: 3/4 NPT, M25	

*Cable Entries: For side and top, 3/4 NPT is standard. If others are required, customer needs to indicate when placing an order.

Technical Parameter

• Electrical

Specification	EX-150W-A3 YZDAF	EX-180W-A3 YZDAF	EX-200W-A3 YZDAF
Rated Power	150W	200W	80W
Input Voltage	200-250VAC		
Input Frequency	50/60Hz		
Power Factor	> 0.95		
Emergency Function	Optional (TGA emergency pack)		

• Optical

Specification	EX-150W-A3 YZDAF	EX-180W-A3 YZDAF	EX-200W-A3 YZDAF
Lumen Output	21000lm	28000lm	11200lm
Lumens Per Watt	140lm/W		
CCT	2200K-7000K		
CRI	> 70		
Beam Angle	40°/45°/60°/90°		
Dimming	Both non-dimmable and 0-10V dimming are available		

• Environmental

Specification	EX-150W-A3 YZDAF	EX-180W-A3 YZDAF	EX-200W-A3 YZDAF
Ambient Operating Temperature	T5: -40°C to +45°C (-40°F to +113°F); T6: -40°C to +40°C (-40°F to +104°F)		

• Mechanical

Specification	EX-150W-A3 YZDAF	EX-180W-A3 YZDAF	EX-200W-A3 YZDAF
Housing Material	Copper-free aluminum		
Lens	Tempered glass & PC		
Hardware	Stainless steel		
Fixture Color	Gray RAL7040 (Standard)		
Protection	IP66/IP67/IK08 (glass cover)/IK10 (with wire guard)		
Mounting	Ceiling, Wall, Hook, Pole, Arm, Stanchion		
Cable Entries*	Side: 3/4 NPT, M20, M25, 1/2NPT Top: 3/4 NPT, M25		

*Cable Entries: For side and top, 3/4 NPT is standard. If others are required, customer needs to indicate when placing an order.

Technical Parameter

• Electrical

Specification	EX-250W-A4 YZDAF	EX-300W-A4 YZDAF	EX-400W-A4 YZDAF
Rated Power	250W	300W	400W
Input Voltage	200-250VAC		
Input Frequency	50/60Hz		
Power Factor	> 0.95		
Emergency Function	Optional (TGA emergency pack)		

• Optical

Specification	EX-250W-A4 YZDAF	EX-300W-A4 YZDAF	EX-400W-A4 YZDAF
Lumen Output	35000lm	42000lm	56000lm
Lumens Per Watt	140lm/W		
CCT	2200K-7000K		
CRI	> 70		
Beam Angle	40°/45°/60°/90°		
Dimming	Both non-dimmable and 0-10V dimming are available		

• Environmental

Specification	EX-250W-A4 YZDAF	EX-300W-A4 YZDAF	EX-400W-A4 YZDAF
Ambient Operating Temperature	T5: -40°C to +40°C (-40°F to +104°F)	T5: -40°C to +40°C (-40°F to +104°F)	T5: -40°C to +25°C (-40°F to +77°F)


• Mechanical

Specification	EX-250W-A4 YZDAF	EX-300W-A4 YZDAF	EX-400W-A4 YZDAF
Housing Material	Copper-free aluminum		
Lens	Tempered glass & PC		
Hardware	Stainless steel		
Fixture Color	Gray RAL7040 (Standard)		
Protection	IP66/IP67/IK08 (glass cover)/IK10 (with wire guard)		
Mounting	Ceiling, Wall, Hook, Pole, Arm, Stanchion		
Cable Entries*	Side: 3/4 NPT, M20, M25, 1/2NPT Top: 3/4 NPT, M25		


*Cable Entries: For side and top, 3/4 NPT is standard. If others are required, customer needs to indicate when placing an order.

Product Dimensions (all in millimeters)


A

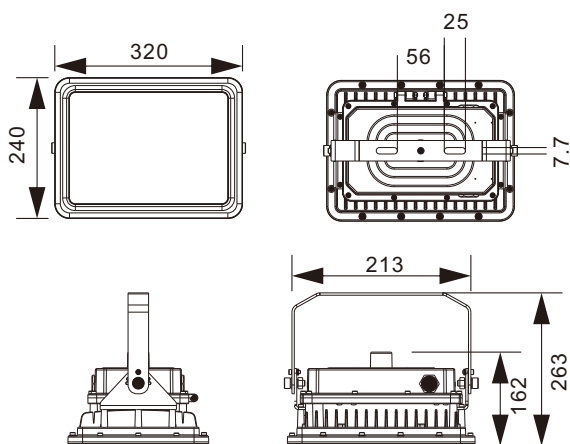

A3

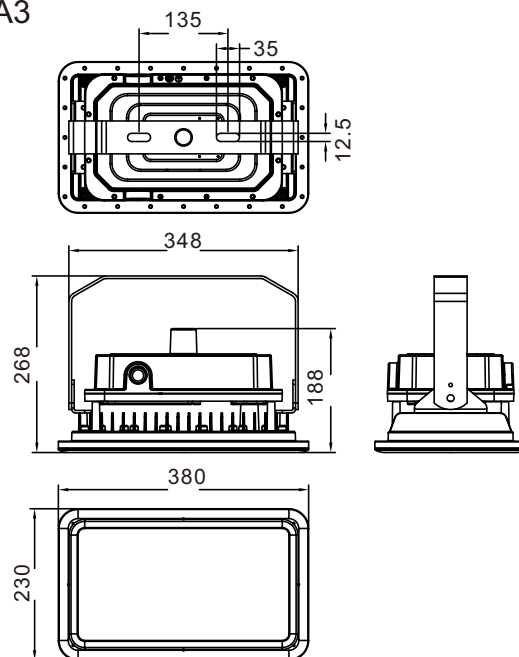

A4

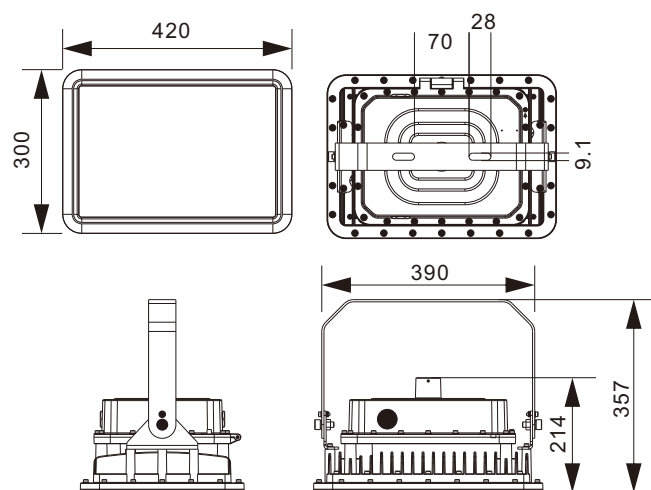

• Packing Information

Model	Net Weight*	Gross Weight*	Quantity/Carton	Package Dimensions (LxWxH)
EX-XXXW-A YZDAF	6.95kg	7.90kg	1 pc	375x340x215mm
EX-XXXW-A3 YZDAF	8.30kg	10.30kg	1 pc	485x340x365mm
EX-XXXW-A4 YZDAF	15.1kg	15.80kg	1 pc	510x480x350mm

*Please note that net weight and gross weight may be subject to change because of actual configuration.

Ordering Guide




1. Model Series	2. Wattage	3. Product Code	4. Dimmable Optinal
Explosion Proof Light	A: 80/100W A3:150/180/200W A4: 250/300/400W	A A3 A4	Y: Dimmable N: Non-dimmable

5. Color Temp.	6. Beam Angle	7. Glass Type	8. Optional
22=2200K, 30=3000K, ..., 70=7000K	D40=40° D45=45° D60=60° D90=90°	A=blank: flat glass A=C: Drop lens & wire guard	F: for food zone or blank

Photometric

40 Degrees

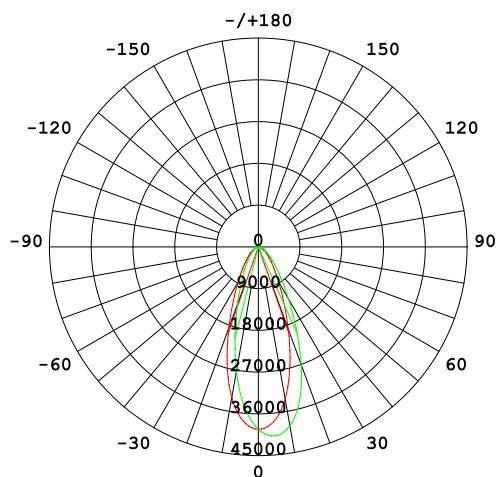


AVERAGE BEAM ANGLE(50%):38.6 DEG

UNIT:cd

— C0/180,38.7°

— C90/270,38.5°

60 Degrees

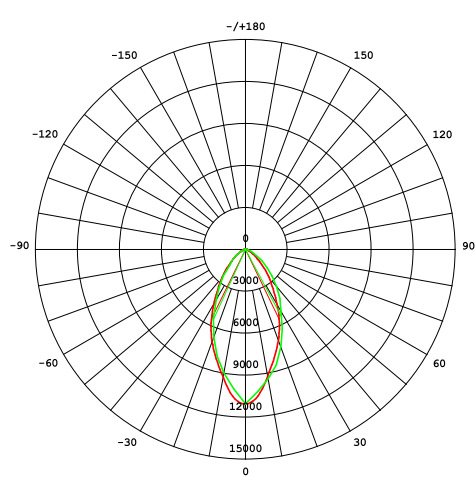


AVERAGE BEAM ANGLE(50%):52.5 DEG

UNIT:cd

— V 0.0DEG PLAN,52.3

— H 0.0DEG PLAN,52.7

90 Degrees

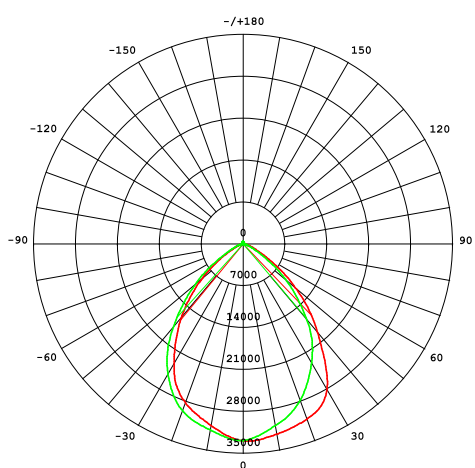


AVERAGE BEAM ANGLE(50%):82.8 DEG

UNIT:cd

— V 0.0DEG PLAN,83.2

— H 0.0DEG PLAN,82.4

120 Degrees

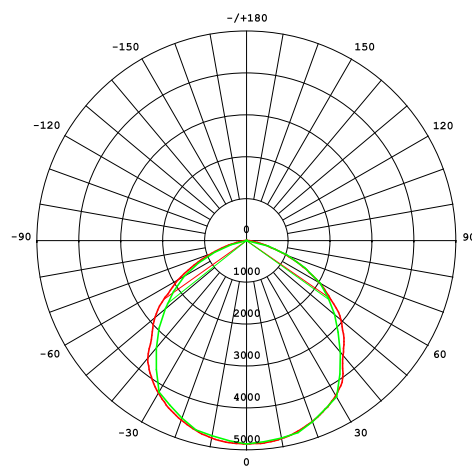

AVERAGE BEAM ANGLE(50%):107.8 DEG


UNIT:cd

— V 0.0DEG PLAN,109.9

— H 0.0DEG PLAN,105.8

Mounting Methods and Accessories

• Option 1: Ceiling Mounting

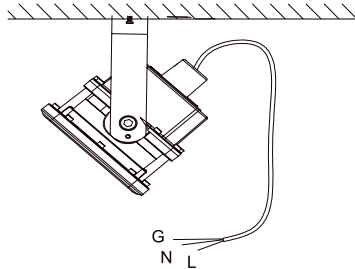


• Accessory



Bracket

• Option 2: Wall Mounting

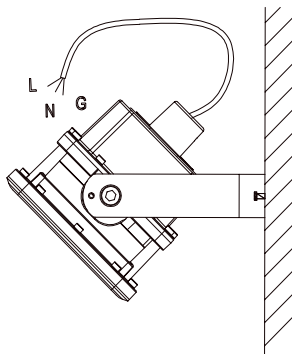


• Accessory



Bracket

• Option 3: Hook Mounting

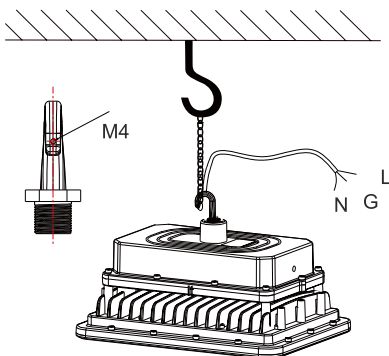

• Accessories




Hook
Ex-Hook



Pendant Chain
Ex-Straight Chain

Mounting Methods and Accessories


• Option 4: Pole Mounting (Vertical)

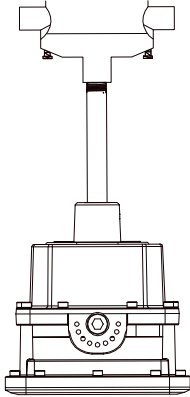

• Accessories




Junction Box
EX-HD51-KB1



Pole
Ex-Straight Pipe

• Option 5: Pole Mounting (Non-vertical)

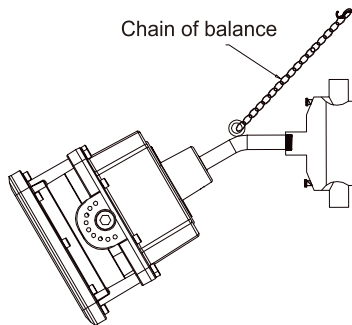

• Accessories



Junction Box
EX-HD51-KB1




Pole
Ex-Bended Pipe




Pendant Chain
Ex-Straight Chain

• Option 6: Pole Mounting

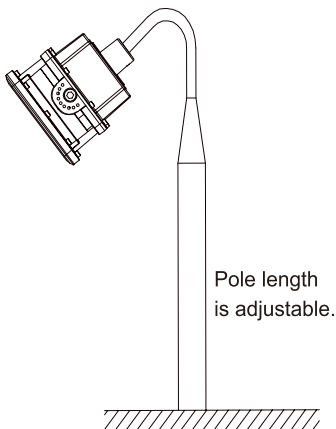

Mounting Methods and Accessories

- Option 7: Stanchion Mounting on the Wall

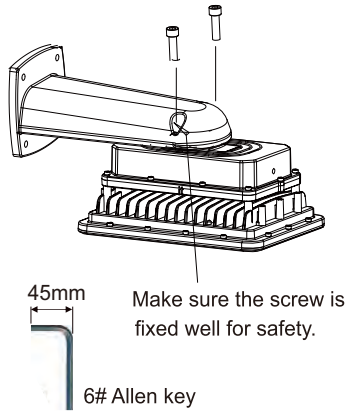


- Accessory



Stanchion Arm
Ex-MArm

- Option 8: Stanchion Mounting on the Pole (90 Degree)

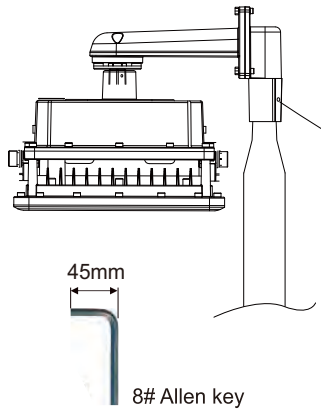


- Accessories



Installation Component
90 Degrees

- Option 9: Stanchion Mounting on the Pole (25 Degree)

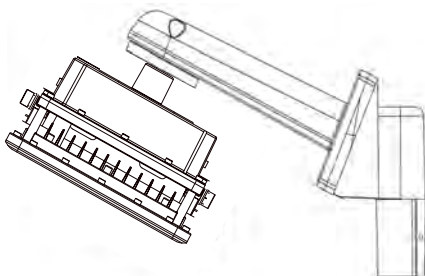


- Accessories



Installation Component
25 Degrees

Mounting Methods and Accessories

- Option 10: Wall Mounting with Junction Box (90 Degree)

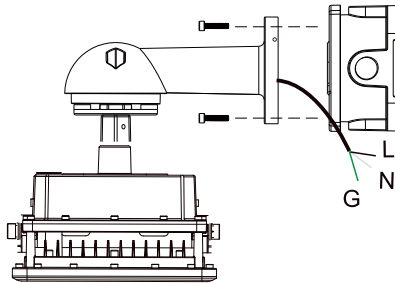


- Accessory



Stanchion Arm
EX-HD51-KYD 90

- Option 11: Wall Mounting with Junction Box (25 Degree)

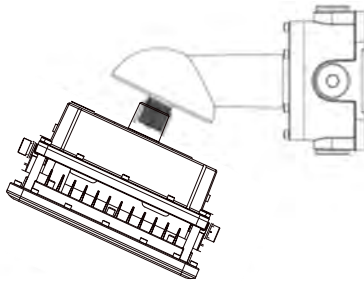

- Accessory



Stanchion Arm
EX-HD51-KYD 25