




LED UFO High Bay Light

HIGH LIGHT · DURABLE · SAVE COST

BB-GKD-XXXW-E13

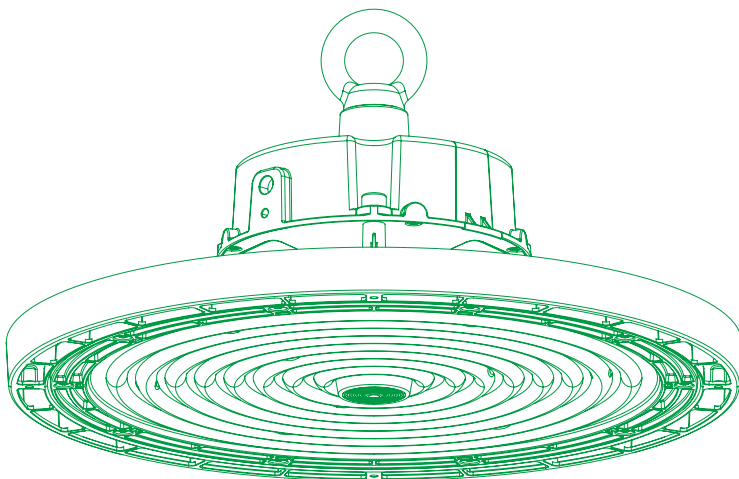

CCT Adjustable

3000K 4000K 5000K

SWITCH FREELY

Wattage Adjustable

LED ufo highbay lights is a device which are consist of aluminum alloy frame, LED light source model and driver. It can replace HID and other traditional lighting fixtures, with higher efficiency, longer lifespan, at least 50000H, and lower chance of failure, higher reliability, and better cost than any previous lamp.

The high-performance, IP65-rated luminaire delivers a minimum of 130 lm/W, providing significant energy savings while remaining durable in the field.

- High Efficiency: Delivers 130lm/w for bright, energy-saving illumination.
- IP65 Waterproof: Ensures durability in harsh environments, protecting against dust and water ingress.
- 5-Year Warranty: Reliable performance backed by long-term assurance.
- Easy Installation: Quick and secure setup for efficient setup in workshops and factories.
- Multiple Wattage Options: Choose between 100W, 150W, and 200W for optimal brightness needs.

Product Picture



100W



150W



200W



MODEL:BB-GKD-XXXW-E13

DATA SHEET

Power	100W	150W	200W
Model	BB-GKD-100W-E13	BB-GKD-150W-E13	BB-GKD-200W-E13
Luminous Flux	13000lm	19500lm	26000lm
Beam Angle	60° / 90° / 120°		
Materials	Aluminum Alloy + PC		
Luminous Efficacy	130/lm/W		
Opera Tion Temp	-40 to +45 °C		
CCT	3000K WW / 4000K NW / 5000K DW (Adjustable)		
CRI	70+		
Life Span	50,000 Hours at 25 °C		
Voltage	100-277VAC/50-60HZ		
Driver	UL Listed Power Supply		
Dimmable	Available		
Luminous Source	SMD LED		
Install	Hanging Chain Installation / Upright Pole Installation		
IP	IP 65		
PF	>0.90		
Warranty	5 Years		



Dimension

Ø219mm
[Ø8.62in]

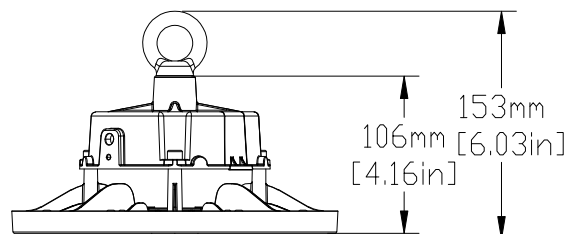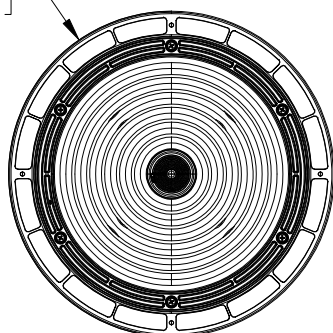



100W

Ø261mm
[Ø10.27in]

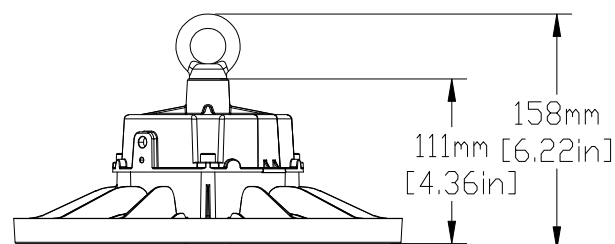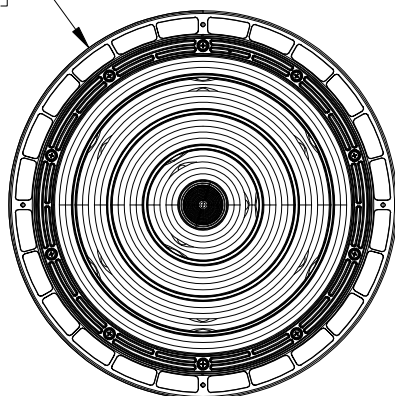

150W

Ø300mm
[Ø11.81in]

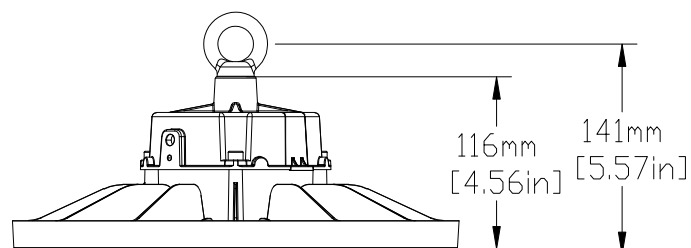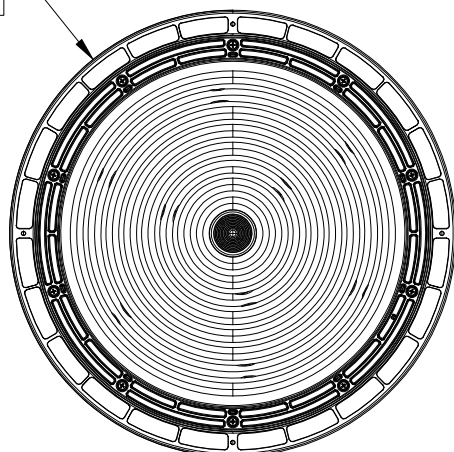

200W

Product Details




Air convection, thermoelectric separation


The power supply and lamp body are designed to be separated, making it easy to disassemble and maintain

1. Optical PC lens, made of UV resistant material, does not turn yellow after long-term use, and is resistant to high temperatures.
2. Silicone waterproof sealing strip. UV resistant material, reliable and not prone to failure.
3. High lumen SMD 2835 LED beads
4. High thermal conductivity aluminum substrate for faster heat dissipation.
5. ADC12 die cast aluminum radiator with an efficiency of up to 96W/M.K.
6. Circular industrial and mining professional power supply
7. Cast iron lifting ring


Installation Method

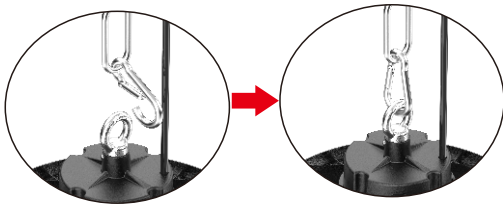

Brown line: L
Blue line: N
Yellow green line: GND



Fixed




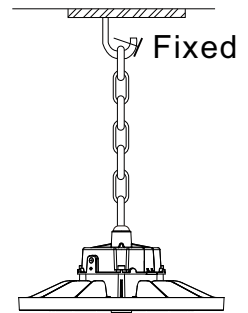


Fixed

1. Installation Of Lifting Rings

2. Chain Sling Installation

Surface Of Intensity Distribution

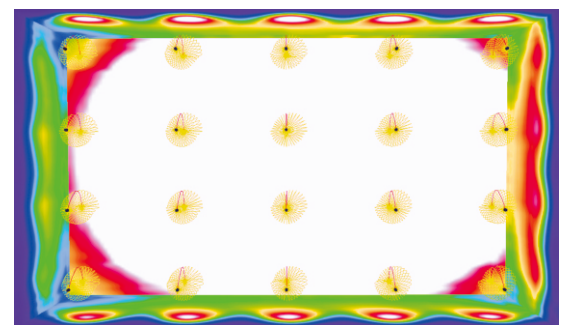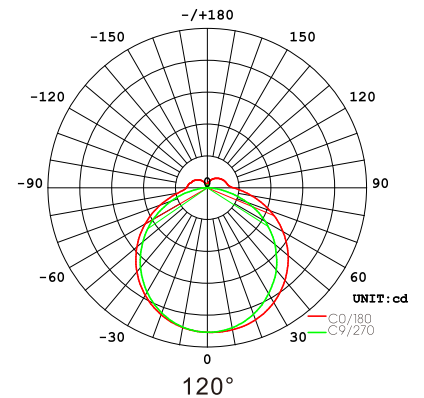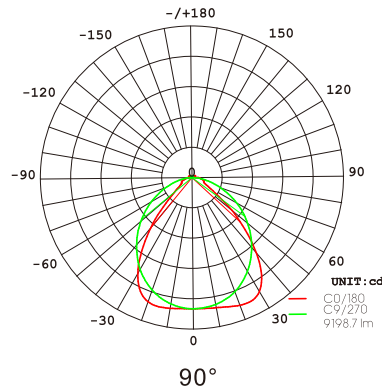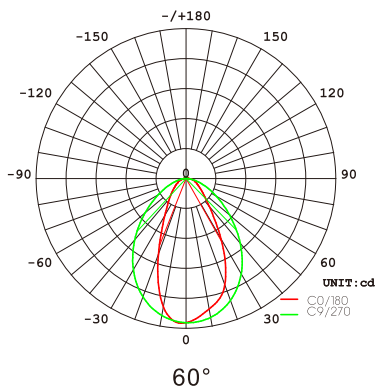


High lumen light distribution design, high brightness, and even distribution of light.

Adjustable Power, Adjustable Color Temperature Instructions

CCT AND WATTAGE SELECTABLE

This fixture has the function of adjusting the lumens output and color temperature on-site.

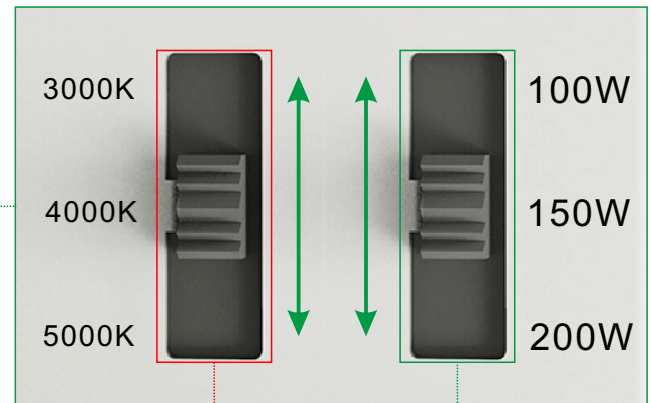


CCT SELECT




Offer Two CCT Adjustable
(3000K, 4000K, 5000K).

WATTAGE SELECT


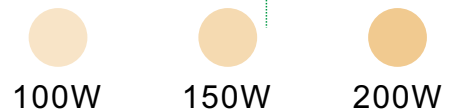


Each Model Supports 3
Positions Wattage Regulation:
100W, 150W, 200W

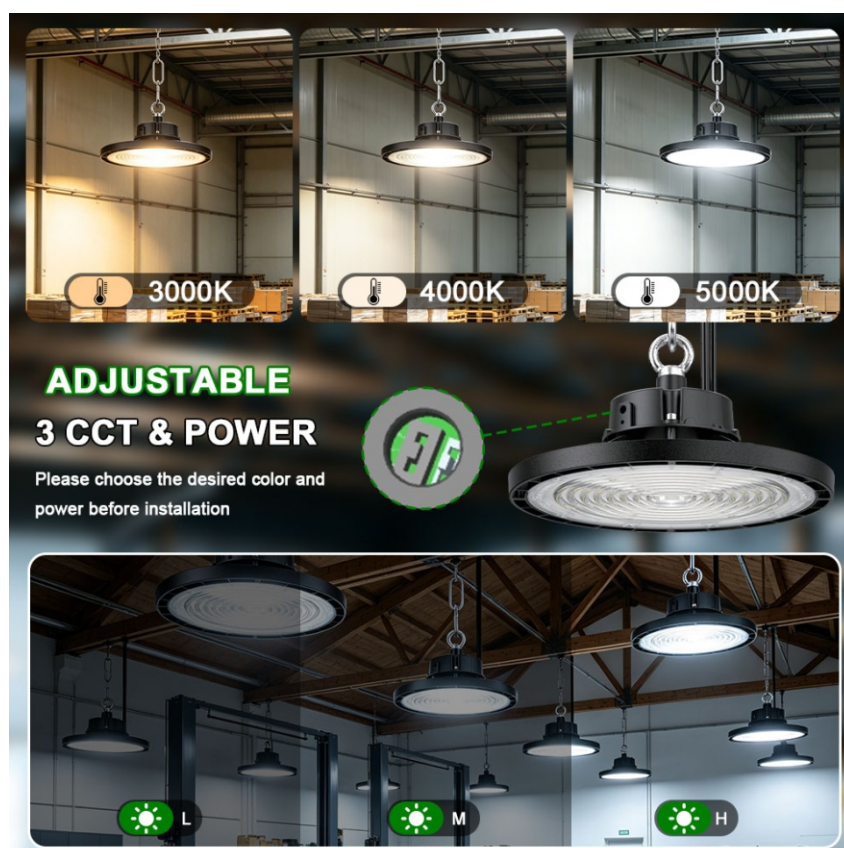

Application

Parking area lightng / Workshop lighthng / Warehouse lighgng /
Indoor stadium lighting / Factories lighting

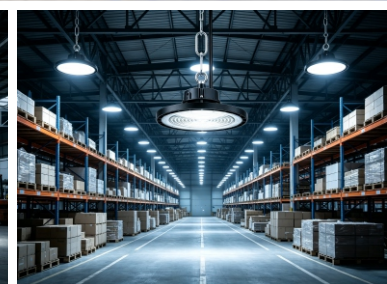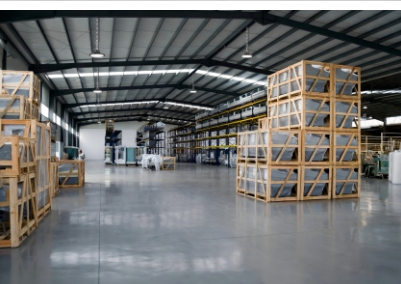

Specifications are subject to change without notice.

Updated date: 2026-07-14