




LED Flood Light

HIGH LIGHT · DURABLE · SAVE COST

BB-FL-XXXW-E5



The LED Flood Light is a high - efficiency and high - performance LED lighting system. Its innovative design not only considers optical versatility but also features a sleek, low - profile appearance, seamlessly integrating optical flexibility with high energy efficiency.

It boasts an outstanding waterproof design, enabling it to maintain a stable operating state in humid environments, thus ensuring safe usage. Moreover, it excels in color temperature adjustment. With its precise fine - tuning function, it can effortlessly create the desired lighting effects for different settings, offering a more comfortable lighting experience across various scenarios.

It can be widely used in stadiums, football fields, airports, squares, playgrounds, construction sites, buildings, etc

Features

- ☆ High light efficiency, with a light efficiency of up to 140lm/w.
- ☆ The protection level reaches Ip65.
- ☆ Integrated die cast aluminum shell, stylish and simple appearance.
- ☆ Large heat dissipation area, good heat dissipation effect, and long service life of the lamp.
- ☆ High temperature resistant lens, surface baked paint process, excellent corrosion resistance.
- ☆ Adopting professional anti glare full cutoff light distribution: light emission angle of 20°/40°/60°/90°/140°/100°/P50.

Product Picture



MODEL:BB-FL-XXXW-E5


DATA SHEET

Power	1000W
Model	BB-FL-1000W-E5
Dimension(mm)	984x656x122
Luminous Flux	140000lm
Materials	Galvanized Steel Sheet + Aluminum Alloy + PC
Beam Angle	20° / 40° / 60° / 90° / 140*100° / P50
Luminous Efficacy	140 lm/w
Operation Temp	-40 to+ 50°C
CCT	2700K SW/3000K WW /4100K NW/5000K DW/5700K CW /6500K SCW
CRI	70+
Life Span	50,000 Hours at 25°C
Voltage	127-277VAC / 50-60HZ ; 277-480VAC / 50-60HZ
Driver	UL Listed Power Supply
Dimming	No
Color	Black
Luminous Source	5050 SMD LED
IP	IP 65
PF	>0.9
Warranty	5 Years


Optics

Tech.Support:

Tell us the place/L,W and usage,we have an engineer team to respond the DIALUX for lights quantity and effects, IES files are available upon request.

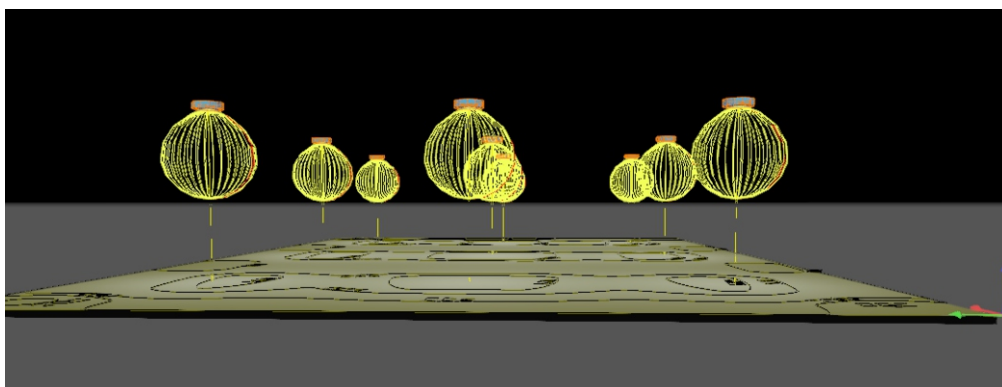

Product Dimensions

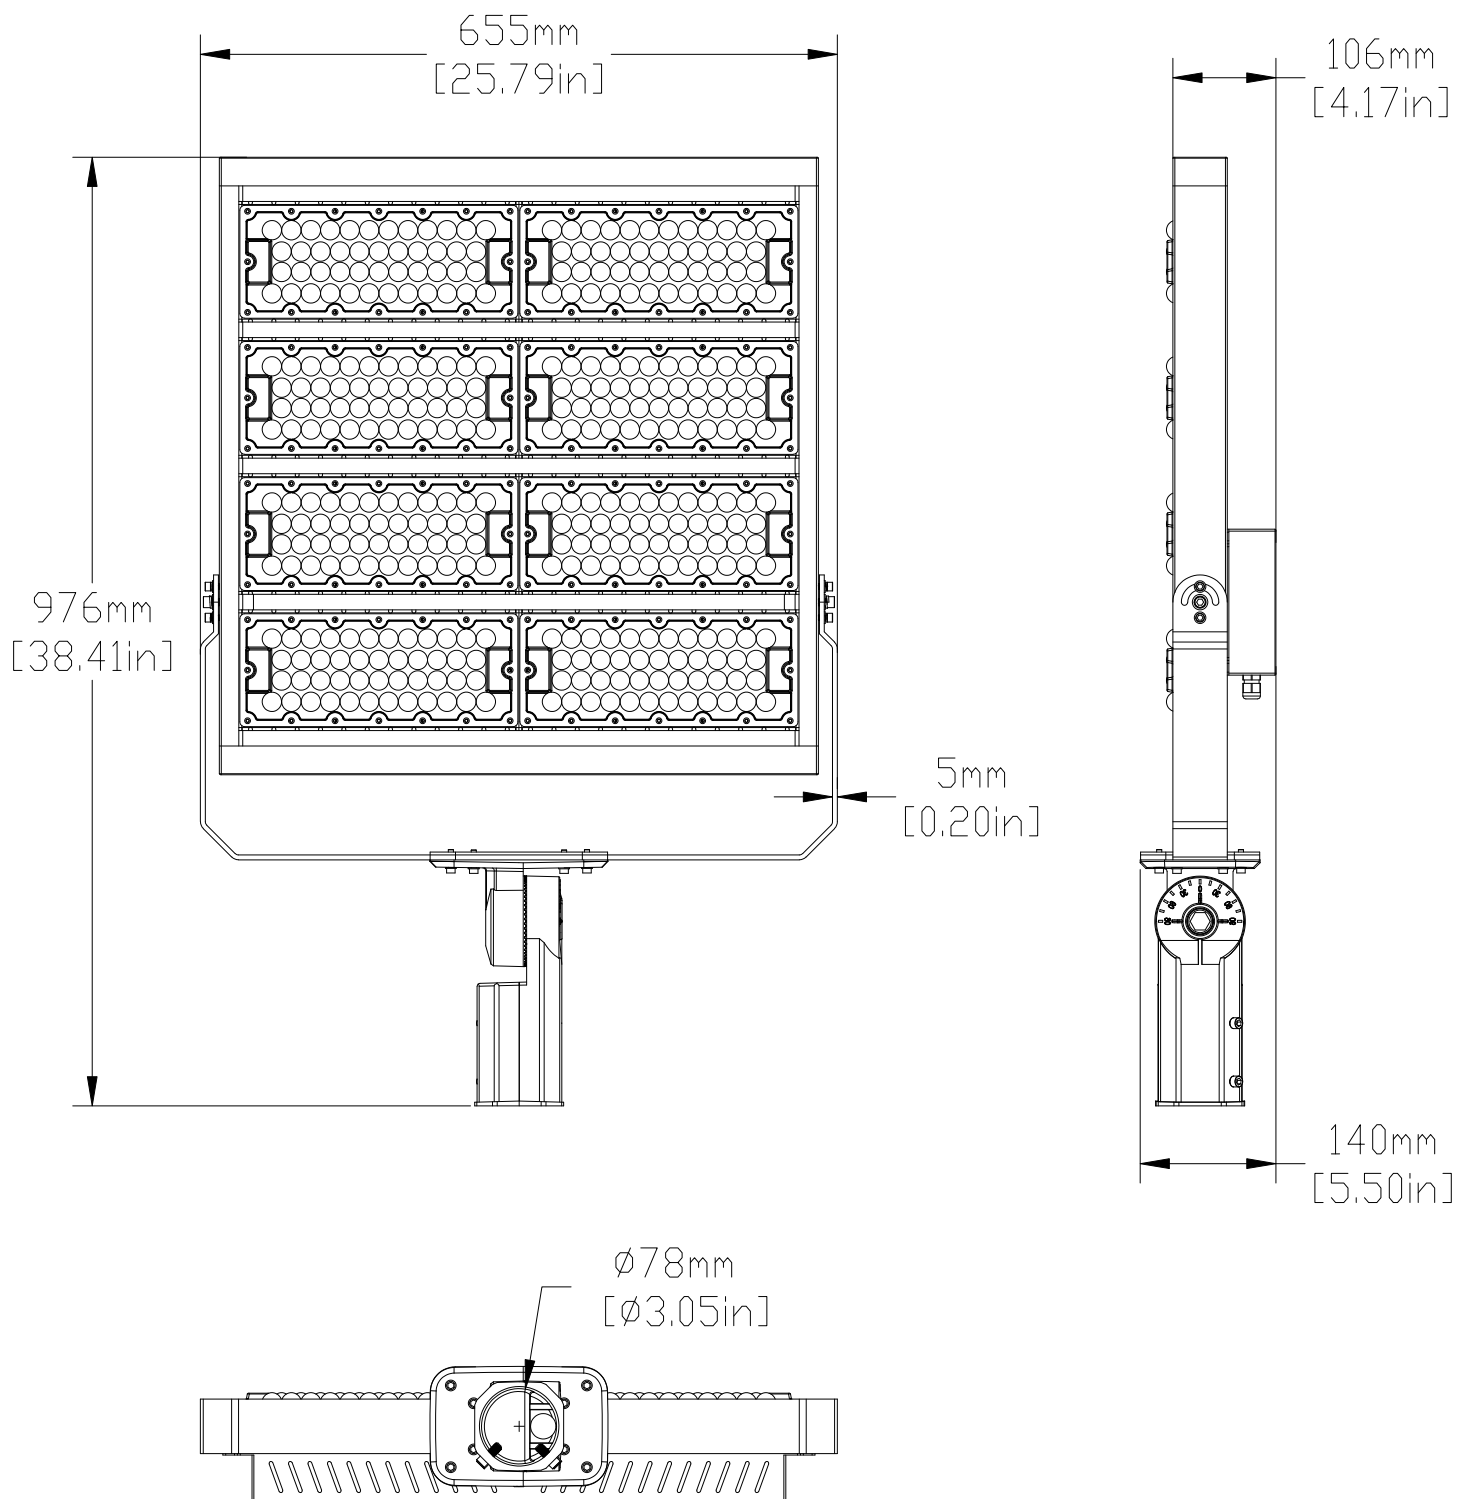

Product Details



Galvanized Steel Plate Frame

PC Lenses

5050 SMD LED

Screw

U-Shaped Bracket

Rod (Caliber: Ø78mm)



Galvanized Steel Plate Frame

Aluminum Alloy Radiator

Can Rotate 180 °

Can Rotate 90 °

Screw

Application

It can be widely used in stadiums, football fields, airports, squares, playgrounds, construction sites, buildings, etc

1. Stadium Lighting
2. Parking lot Lighting
3. Industrial Lighting
4. Port wharf Lighting



Specifications are subject to change without notice.

Updated date: 2026-07-14