

30W/40W/450W/60W/80W/100W E40/E27 Base

Suitable for Parks/Gardens/ Squares/ Outdoor parking lots Residental areas/Villa gardens/Industrial parks/ Lake landscape






LED RGB landscape lights is a device which are consist of aluminum alloy frame, LED light source model and driver. It can be a replacement of HID and other traditional light fixture, provided with higher efficacy, a longer lifeline 30,000H at least or even more upto50,000H and very lower breakdown opportunity, higher reliability and beter cost than any light before. The high-performance, providing significant energy savings while remaining durable in the field.




### **FEATURES**

- O Aluminum material radiator body. Beter heat dissipaaon.
- © Good ant-Corrusion and ann-rust performance in the landscape project.
- © High Efficient LED chips. Tested be good quality aer 10 years application.
- © 16 million colors are available ,choose the color or modes as you want, Createa romantc and interessing atmosphere in your yard.

### **BEAM ANGLE**

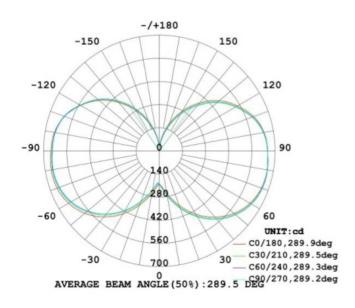

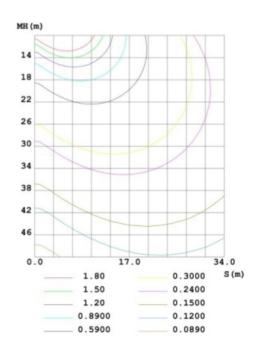








DATA SHEET						
Power	30W	40W	50W	60W	80W	100W
Dimension(mm)	Ø 100.2x209.5	Ø 100.2x209.5	Ø 100.2x243.8	Ø 100.2x243.8	Ø 128x271	Ø 128x301
Model	BB-HJD-30W-P-RGB	BB-HJD-40W-P-RGB	BB-HJD-50W-P-RGB	BB-HJD-60W-P-RGB	BB-HJD-80W-P-RGB	BB-HJD-100W-P-RGB
Beam Angle	360°					
Controller	Remote Controller/APP Control					
Materials	Aluminum Alloy+PC Lens					
Dimming	DIM 0-100					
Operaton Temp	- 40 to + 45 C°					
Life Span	30,000 Gours At 25 C°					
Voltage	100-277VAC/50-60HZ					
Driver	UL listed Power Dupply					
Luminous Source	5050 SMD LED					
IP Ratng	IP 54					
PF	>0.9					
Warranty	3 Years					


# PRODUCTS DIMENSION

#### Driver







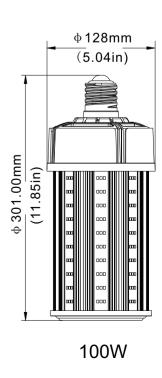





### **RGB COLORFUL LIGHT CONTROLLER**











Time swit

APP control everyday

#### Feature function:

- Cell phone Blue tooth APP control, support Android system and Apple system
- •. 160,000 kinds of colors to choose
- •. 20 kinds of dynamic modes
- •. Grouping control function
- •. Customized mode
- •. Timer function: mer switch
- •. Music mode: light dance with music
- •. Save the favorite light
- •. Save the favorite light

#### **Product Specificaaon:**

Product Name: RGB LED Controller

Application: RGB corn light App Name: Happy Lighting

Control method: Blue Tooth APP or IR Remote or Controller Buton

Input voltage: DC 5-24V

Maximum load power: 144W

Output: One/Dual/Triple/Quad (Output)

Working temperature: -20~55 degrees Celsius

Controller size: L65\*W34\*H16(mm)
Remote control size: L85\*W52\*H7(mm)
Remote control distance: about 20 meters


Weight: 20g

Certficate: CE, RoHS

#### **APP** control instructons:

Afer conneccon between your phone and lights via BT Broadcast you couldcontrol the lights by clicking the functions in the APP.











## **APPLICATION CASE**

RGB corn light is widely used in E40/E27 base ,Such asSports light,Post top light,Flood light, Pole light,High/low bay light,/etc.







