



LED UFO High Bay Light

HIGH LIGHT · DURABLE · SAVE COST

BB-GKD-XXXW-E15



LED ufo highbay lights is a device which are consist of aluminum alloy frame, LED light source model and driver. It can replace HID and other traditional lighting fixtures, with higher efficiency, longer lifespan, at least 50000H, and lower chance of failure, higher reliability, and better cost than any previous lamp. The high-performance, IP65-rated luminaire delivers a minimum of 130 lm/W, providing significant energy savings while remaining durable in the field.

- High Efficiency: Delivers 130lm/w for bright, energy-saving illumination.
- IP65 Waterproof: Ensures durability in harsh environments, protecting against dust and water ingress.
- 5-Year Warranty: Reliable performance backed by long-term assurance.
- Easy Installation: Quick and secure setup for efficient setup in workshops and factories.
- Multiple Wattage Options: Choose between 100W, 150W, and 200W for optimal brightness needs.

Product Picture




100W/150W/200W

MODEL:BB-GKD-XXXW-E15


DATA SHEET

Power	100W	150W	200W
Model	BB-GKD-100W-E15	BB-GKD-150W-E15	BB-GKD-200W-E15
Luminous Flux	13000lm	19500lm	26000lm
Beam Angle	120°		
Materials	Aluminum Alloy + PC		
Luminous Efficacy	130/lm/W		
Opera Tion Temp	-40 to +45 °C		
CCT	2700K SW / 3000K WW / 4100K NW / 5000K DW / 5700K CW / 6500K SCW		
CRI	70+		
Life Span	50,000 Hours at 25 °C		
Voltage	120-277VAC/50-60HZ		
Driver	UL Listed Power Supply		
Dimmable	No		
Luminous Source	2835 SMD LED		
Install	Hanging Chain Installation		
IP	IP 65		
PF	>0.9		
Warranty	5 Years		


Surface Of Intensity Distribution

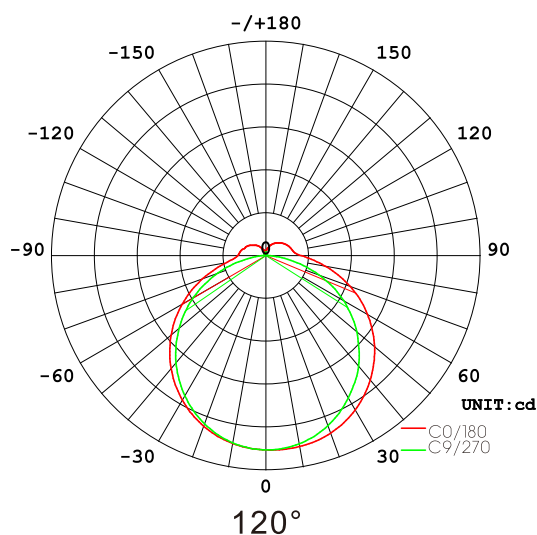


Dimension

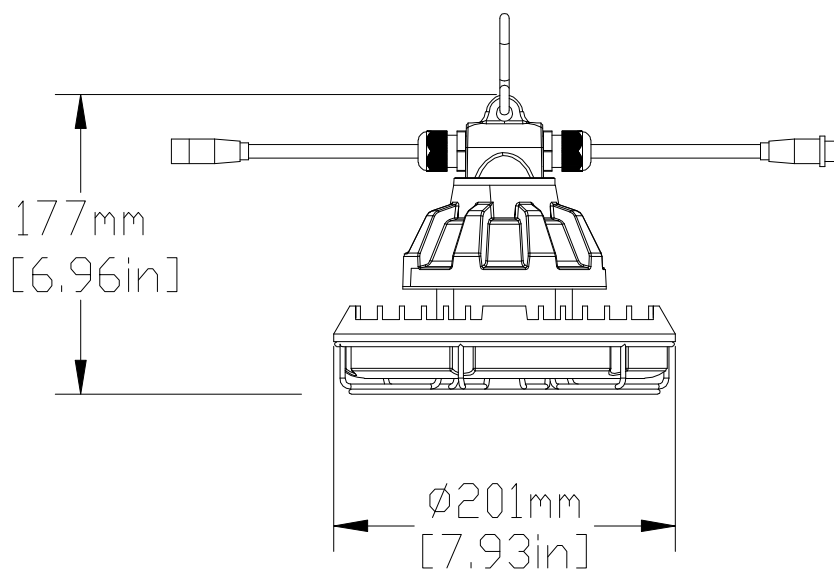

100W

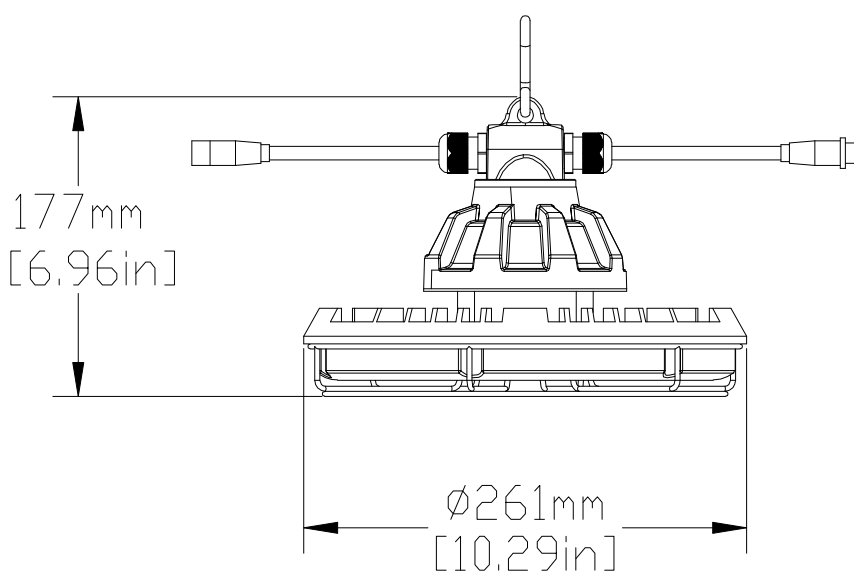


150W

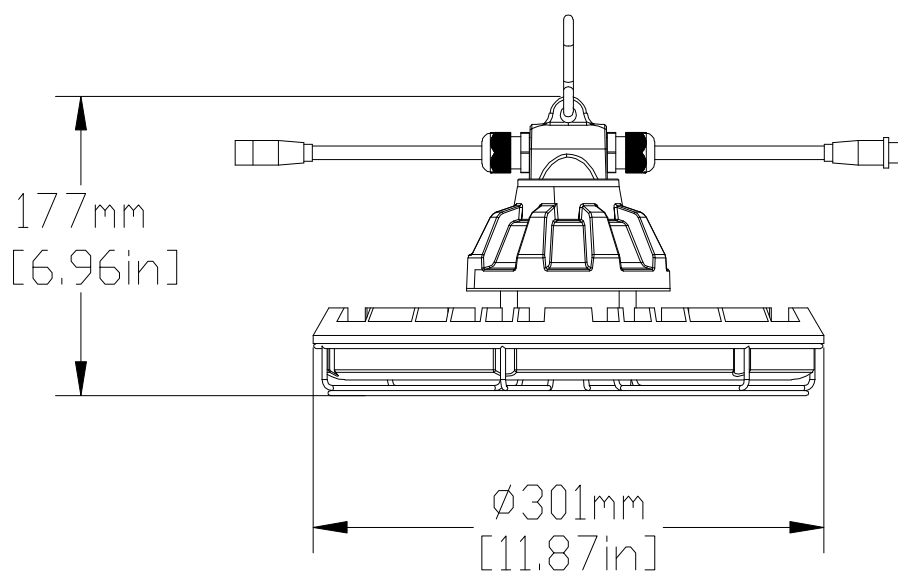


200W

Product Details

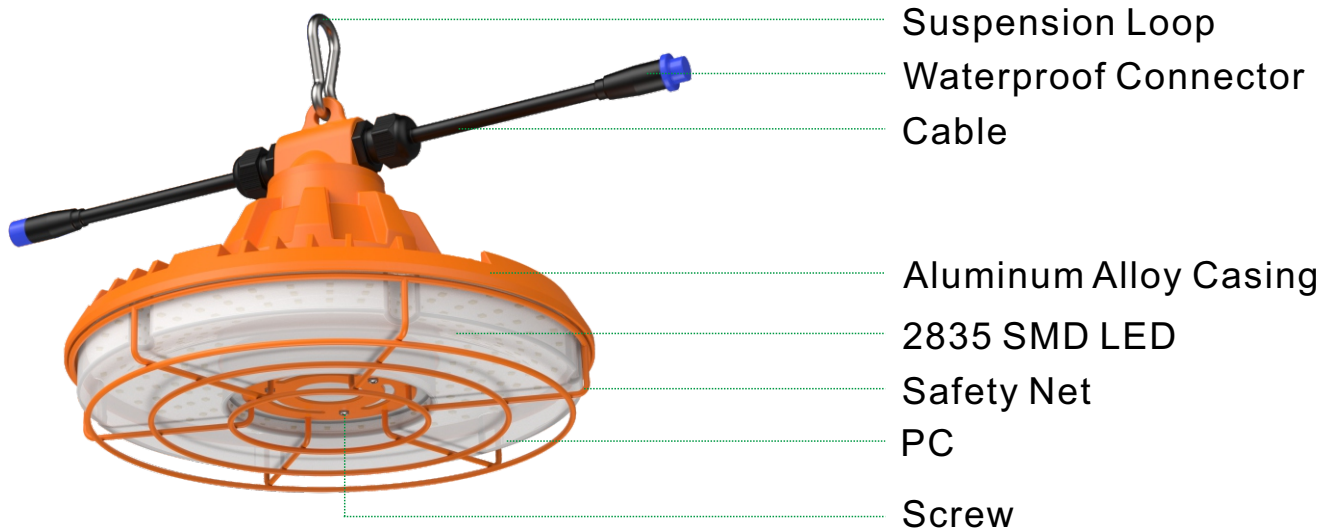

With Connector

For 100~20W lamp, the connector is optional. Customers can choose according to their needs. If necessary, please contact sales.

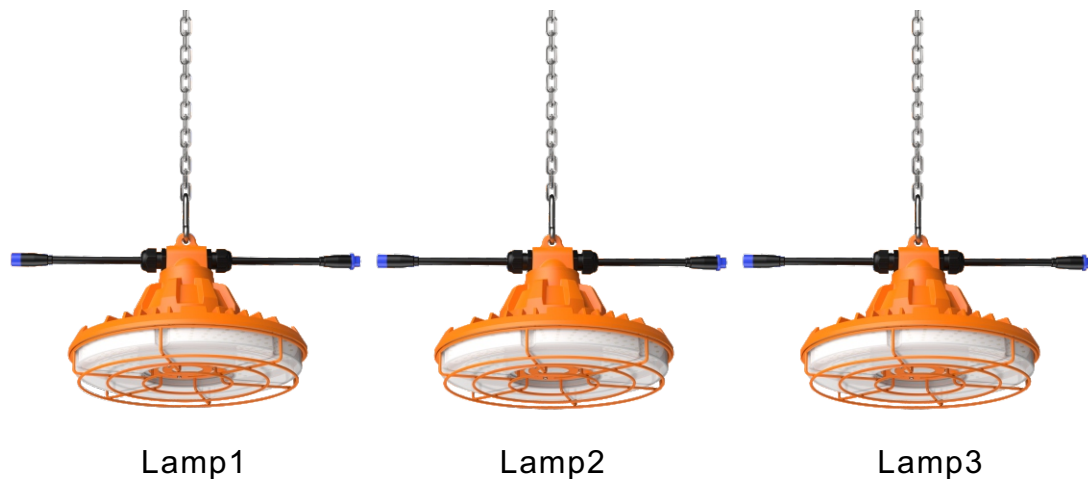


And more...

The luminaire could be linkable series data table

Power	Voltage	Max Link Qty	Voltage	Max Link Qty	Voltage	Max Link Qty
100W	110V	7 PCS	230V	16 PCS	277V	19 PCS
150W	110V	5 PCS	230V	10PCS	277V	12 PCS
200W	110V	4 PCS	230V	8 PCS	277V	9 PCS

Application

Parking area lightng / Workshop lighthng / Warehouse lighthng /
Indoor stadium lighting / Factories lighting

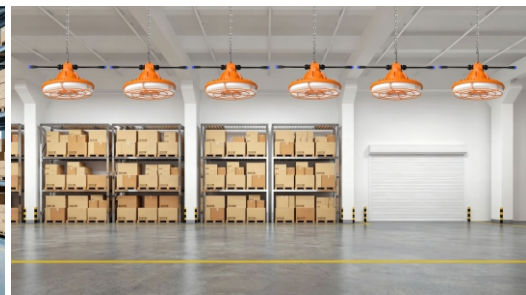

Specifications are subject to change without notice.

Updated date: 2026-08-20